




PCT/GB 2004 / 0 0 0 9 5 1



INVESTOR IN PEOPLE

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

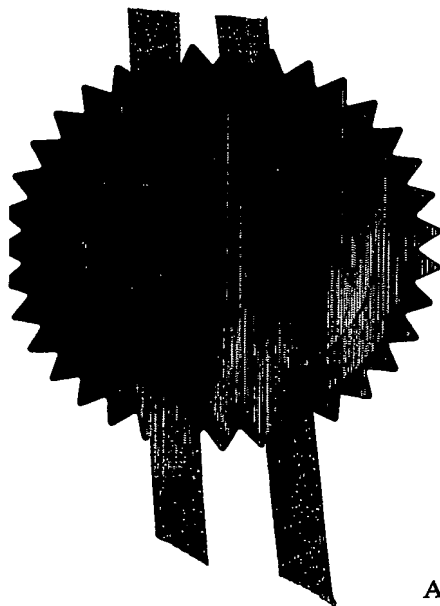

Signed

Dated 24 March 2004

**BEST AVAILABLE COPY**

An Executive Agency of the Department of Trade and Industry

# Patents Form 1/77

Pa Act 1977  
(Rule 16)



17MAR03 E792424-4 D02847  
P01/7700 0.00-0305898.9

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

14 MAR 2003

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

HL81462/ECR

2. Patent application number

(The Patent Office will fill in this part)

0305898.9

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Cementation Foundations Skanska Limited  
Maple Cross House, Denham Way, Maple Cross, Rickmansworth,  
Hertfordshire WD3 9AS

Patents ADP number (if you know it)

8025017002

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

PLACING ELEMENTS IN PILES

5. Name of your agent (if you have one)

Haseltine Lake

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Imperial House  
15-19 Kingsway  
London  
WC2B 6UD

Patents ADP number (if you know it)

34001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 12

Claim(s) 2

Abstract 1

Drawing(s) 3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

Haseltine Lake, Agents for the Applicants

*Haseltine Lake*

14 March 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Elizabeth Cooper-Rolfe

[020] 7420 0500

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

### Placing Elements in Piles

The present invention relates to the construction of structures below ground by means of a technique known as "top-down" construction. In particular, the present invention relates to methods and apparatus for placing and positioning an element, such as a steel section or stanchion, within a pile shaft. Subsequently the element, which is generally positioned vertically above a load bearing pile, may be used to support loads from an above ground structure and to transmit load from ground level to the head of a load bearing pile.

Briefly, top-down construction involves the following steps:

- i) construction of a perimeter wall which is installed from the prevailing ground level;
- ii) installation of load-bearing piles within the curtilage of the perimeter wall. To construct each load bearing pile, a pile shaft of required depth is excavated and may be partially filled with concrete or grout. If the shaft is partially filled at this stage, the concrete of the pile is terminated at a distance below ground that generally corresponds to the level of the (future) basement slab;
- iii) insertion and positioning of an element, which may be a steel column, hollow steel section, precast concrete, or any suitable member, into the 'empty' bore of the pile shaft, above the level of the concrete or "pile head". The element is designed to transmit load

from ground level to the pile head. Generally the requirement is for the element to be positioned vertically, although other orientation requirements may be required for specific applications;

5

iv) Once the element has been positioned within the bore, it is either lowered onto the top of the set concrete in the pile, so that load transmission between the element and the pile is by end-bearing onto the concrete head, or it is plunged some distance into the concrete to become embedded in the pile before it sets.

10

As an alternative to the above method, it is possible for the element to be positioned within the excavated bore shaft before any concrete is placed. Once the element has been positioned within the shaft, concrete is placed to the base of the excavated shaft by means of a concrete supply pipe, and the bore filled to the required depth.

20

Several methods have been used in the past for positioning an element in a pile shaft during top-down construction techniques. For example, during the construction of a cast in place pile, a shaft lining tube of steel or reinforced concrete was installed and the bore was then partially filled with concrete. Once the concrete had set it was necessary for an operative to be lowered into the casing in order to clean the concrete surface and to fix a base plate or similar device to the head of the concrete. The element was then lowered into position and fixed to the base plate by the operative using surveying techniques to adjust the plan position of the element. Generally, the casing

25

30

which was installed to ensure safety during the manned descent was left in place. The cost of the casings and the safety measures taken meant that the costs involved in the operation were substantial.

5

More recently, a variety of tools have been developed which allow the element to be positioned remotely, i.e. from ground level, by means of mechanical, electrical or hydraulic drive means.

10

When positioning an element within a bore hole it is important to be able to monitor and/or adjust the position of the element at or close to ground level, and also to have a knowledge of the position of the element at a lower level in the pile shaft, preferably at or near the head of the (future) concrete pile.

15

In EP 0302707, an apparatus for positioning a column in an underground pile shaft is described which comprises a locating frame having at least one pair of adjustable guide frames at either end of the frame. The frame is placed into a borehole so as to define an interior space through which the element is lowered, and is braced against the inner wall of a temporary casing which lines the pile shaft. The guide frames are remotely adjustable and can be operated to locate the column at that level. Once the guide frame at the upper level has been adjusted, the guide frame at the lower level is also adjusted so as to adjust the plan position of the column at the lower level.

20

25

30

There are a number of problems which have been encountered with the locating device described in EP

0302707. Firstly, the frames are inconvenient to store or handle due to their weight and size. Furthermore, the frame requires a temporary casing to be inserted into the bore to a depth of at least the length of the  
5 frame. The temporary casing is cumbersome and the process of installing it often time consuming.

---

According to one aspect of the present invention there is provided an apparatus for positioning an element in  
10 a borehole, the apparatus comprising an upper positioning means and a lower positioning means for adjusting the plan position of the element at upper and lower levels respectively, wherein the positioning means are joined by means of an connection having an  
15 adjustable length.

Accordingly, the present invention allows the upper and lower positioning means to be joined by means of a variable length connection such as wire ropes, chains,  
20 link arms or the like. A variable length connection comprising telescopic arms is also envisaged. Such an embodiment would advantageously comprise at least two downwardly protruding arms provided on the upper positioning means, which are received by at least two  
25 upwardly protruding conduits provided on the lower positioning means, or visa versa. The arms may then be telescopically received within the conduits so that the distance between the upper and lower positioning means may be adjusted from a maximum distance to a minimum  
30 distance. A number of latches, bolts or the like are provided such that the length of the telescopic connection can be reliably secured.

Therefore, the present invention allows the apparatus to be adjusted to suit the specific requirements of a particular operation such that the lower positioning means is located at or near the (future) pile head.

5    Embodiments of the present invention therefore allow columns to be positioned at greater depths than were previously possible with known positioning apparatus. The apparatus of the present invention is also advantageous in that it may be more easily stored and  
10   transported, since the connection between the upper and lower positioning means may be shortened to a more manageable length. Advantageously, the connection may be removed from the apparatus altogether when it is not in use, so that it may require less storage/  
15   transportation space.

Preferably, the upper and/or the lower positioning means have a plurality of locking rams or jacks which enable the orientation of the apparatus to be braced  
20   and secured in place within the bore. The locking rams may be arranged as two orthogonal pairs, or as 3 or 5 rams spaced at substantially equal distances around the bore. In many instances it is preferable that a temporary shaft lining tube or casing is lowered into  
25   at least the upper region of the bore hole, prior to inserting the apparatus into the bore, so that the locking rams of at least the upper positioning means can be braced against the temporary casing. Dowels fitted to the temporary tube/casing allow the  
30   orientation of the upper positioning means within the bore to be fixed.



Furthermore, by providing the lower positioning means with locking rams having bracing plates, the lower positioning means may be located at some distance below the toe of a temporary casing positioned within the bore, i.e. in the lower uncased bore. The bracing plates allow the force exerted by the locking rams on the surrounding bore to be spread over a greater surface area, so as to alleviate damage to the continuity of the bore. This allows the temporary casing to be considerably shorter than was usually necessary when using the prior art tool.

According to a second aspect of the present invention there is provided a method of positioning an element in a borehole, the method comprising the steps of:

- i) placing into the borehole an apparatus comprising an upper positioning means and a lower positioning means for adjusting the plan position of the element at upper and lower levels respectively, the positioning means being joined by means of a connection having an adjustable length;
- ii) lowering the element into the borehole within an interior space defined by the apparatus; and
- iii) adjusting the upper and lower positioning means to achieve the desired plan position of the element at the upper and lower levels respectively.

In a preferred embodiment of the present invention, the upper and lower positioning means each comprise a frame that defines an interior space which, when placed inside a borehole for use, extends along the longitudinal axis of the borehole. An element can then be passed through the interior space of the upper

positioning means and extending down the borehole into the interior space of the lower positioning means.

The upper and lower positioning means are provided with a guide means for steering or adjusting the plan

- 5 position of an element within the interior space. In preferred embodiments, the guide means comprises a first and second pair of rollers which are moveable in mutually orthogonal directions across the horizontal plane of the interior space. The movement of the  
10 rollers may be by means of mechanical electrical or hydraulic drive means.

- Embodiments of the present invention are also envisaged in which a plurality of discrete element sections are  
15 positioned within the bore, each element section being positioned and then connected to the previously positioned section until the appropriate upper level has been achieved.

- 20 Locating the element at or close to ground level is relatively straightforward and can be accomplished by means of known surveying techniques. However, accurately determining and adjusting the position of the element at a location below ground has been found  
25 to present a number of difficulties, primarily because of tolerances, such as "bow", which are inherent in almost all elements. Due to the length of the element and the fact that it is unlikely to be precisely straight, it is not sufficient to use a spirit level at  
30 or near ground level to measure the verticality over the length of the column. A number of techniques have therefore been developed which allow the plan position of the lower level to be brought into alignment with

the plan position of the upper level. Therefore by aligning the plan position of an upper and lower cross section of the element, the "bow" in the element becomes irrelevant since the vertical alignment of the two predetermined levels can be assured.

---

For example, a laser plumb device may be used which comprises a laser emitting means fitted at or near the upper level and a target positioned at or near the lower level. The centre-line of the laser and the target must both be at a fixed offset from the true centre-line of the column cross-section. Usually, both the laser and the target are fitted to the web of the column at the centre, and a remote camera or binoculars are needed to view the laser spot on the target.

An inverted plumb-bob may be used in dry bores, and/or in flooded bores (where laser plumb devices cannot operate). This comprises a pipe filled with water with a line fitted to the centre line of a base plate and having a float at the head. As with the laser system, the pipe has to be fitted at fixed offsets from the centre line of the column cross section.

Another technique which has been developed is the use of a wireline which extends along the length of the column and is fitted to brackets fixed to the column and located at or near the top and bottom thereof. An electrolevel monitor is attached to the wireline in order to determine its inclination and therefore any mis-alignment in the plan position of the upper and lower levels of the column. The electrolevel monitor, which is attached to the wire so as to be parallel to

it, houses a pair of electrolevel gauges which are placed orthogonally within the housing. The electrical output of the electrolevel gauges varies as the inclination of the monitor varies and may be  
5 conveniently monitored by a suitable meter such as a digital meter. To ensure reliability, a microprocessor is used to take multiple readings and display the mean, so that the stability and integrity of the system can be evaluated. Fluctuations in the readings will  
10 indicate the presence of instabilities in the position of the element.

The wireline and electrolevel monitor technique is particularly suitable for use with the present  
15 invention, since it can monitor the alignment and therefore the plan position of two cross sections of the column at a greater depth than either of the other techniques. By attaching the wire to a bracket positioned at or near the bottom of the column, the  
20 plan position of two levels of significant distance apart can be monitored.

For a better understanding of the present invention, and to show how the same may be carried into effect,  
25 reference will now be made, by way of example, to the accompanying drawings, in which:

Figure 1 shows an apparatus embodying the present invention for locating an element in a borehole;  
30

Figures 2A and 2B show longitudinal sectional views through the upper and lower positioning means of the

apparatus embodying the present invention shown in Figure 1; and

Figure 3 shows a longitudinal element which is provided with a wireline and electrolevel monitoring system.

---

Figure 1 shows an apparatus embodying the present invention which has been placed within a borehole 1. The apparatus comprises an upper positioning means 2 and a lower positioning means 3 which are joined together by means of an adjustable length connection 4 in the form of a metal chain. Each of the positioning means comprises a rigid frame 5,6 which defines an interior space through which the column to be positioned may be lowered, and a pair of rollers 7, 8 and 9, 10. The rollers may be moved in mutually orthogonal directions as shown.

The present explanation describes the steps involved in positioning an element within a pile shaft, when the lower part of the bore has been partially filled with concrete. As previously discussed, techniques whereby concrete is placed to a lower level within the bore after the element has been positioned, are equally applicable to the present invention.

In use, the apparatus is lowered into the borehole 1 and the upper positioning means 2 is secured in place by means of orthogonal locking rams (not shown) which are braced against a temporary casing 11. The plan orientation of the upper positioning means 2 is secured by means of dowels 12 temporarily fixed to the top of the casing 11. The length of the connection 4 is adjusted to suit the requirements of the operation so that when lowered into the bore the lower positioning means 3 is just above the top of the pile head 13. A column 14, in the form of a steel "H" section, is

lowered into the borehole 1 through the interior space defined by the upper and lower positioning means 2 and 3 respectively to a level just above the head of the concrete within the load bearing pile 13. The rollers in the upper and lower positioning means, which are conveniently moved as far apart as possible before use, are moved horizontally so as to bear on the outer edges of the column 14. They are then used to adjust the plan position of the column at the upper and lower level.

Power is supplied to the lower positioning means by means of hydraulic power supply means 18. It should be appreciated however that electric power may be conveniently used as an alternative to hydraulic power.

Figures 2A and 2B represent longitudinal sectional views through the upper and lower positioning means 2, 3 respectively of the arrangement illustrated in Figure 1, and show in more detail the pairs of rollers in the upper positioning means (2A) and the lower positioning means (2B). Also shown in Figure 2A are four locking rams 15 which are braced against the temporary casing and serve to secure the upper positioning means 2 at a fixed location within the temporary casing. In Figure 2B are shown four locking rams 16 which are braced against the unlined bore and serve to secure the lower positioning means at a fixed location within the bore. The locking rams are each provided with a bracing plate 17, which protect the continuity of the unlined bore by spreading the bracing force over a larger surface area.

Figure 3 shows a longitudinal column 20 in the form of an "H" section which is partially lowered into a bore 21 above the level of a concrete pile head 27. For reasons of simplicity the apparatus of the present invention is not shown, however the column 20 is provided with a wireline 22 which extends substantially along the length of the column and is fitted to brackets 23 and 24 located near the top and bottom of

the column 20. The brackets 23 and 24 are attached at identical distances from the central and side portions of the H section, so that the wireline 22 is at a fixed identical position with respect to the top and bottom sections of the column. An electrolevel monitor 25 is attached to the upper region of the wireline in order to determine the inclination of the column 20. The electrolevel monitor, which is attached to the wire so as to be parallel to it, houses a pair of electrolevel gauges which are placed orthogonally within the housing. The electrical output of the electrolevel gauges varies as the inclination of the monitor varies and is monitored by a digital meter 26.

15

20

25

30

35

CLAIMS

1. An apparatus for positioning an element in a borehole, the apparatus comprising an upper positioning means and a lower positioning means for adjusting the plan position of the element at upper and lower levels respectively, wherein the positioning means are joined by means of a connection having an adjustable length.
2. An apparatus as claimed in claim 1, wherein the upper and lower positioning means each comprise a frame that defines an interior space which, when lowered into the borehole, will extend along the longitudinal axis thereof.
3. An apparatus as claimed in claim 2, wherein the upper and lower positioning means are provided with a guide means for adjusting the plan position of an element within the interior space.
4. An apparatus as claimed in claim 3, wherein the guide means comprises a first and a second pair of rollers which are moveable in mutually orthogonal directions across the interior space.
5. An apparatus as claimed in any preceding claim, wherein the connection comprises wire ropes.
6. An apparatus as claimed in any one of claims 1 to 4, wherein the connection comprises chains.
7. An apparatus as claimed in anyone of claims 1 to 4, wherein the connection comprises link arms.



8. An apparatus as claimed in any preceding claim,  
wherein the connection comprises a pair of arms  
provided on one of the positioning means which are  
5 telescopically received in a pair of conduits provided  
on the other positioning means.

---

9. A method of positioning an element in a borehole,  
the method comprising the steps of:

10 i) placing into the borehole an apparatus comprising an  
upper positioning means and a lower positioning means  
for adjusting the plan position of the element at upper  
and lower levels respectively, wherein the positioning  
means are joined by means of a connection having an  
15 adjustable length;

ii) lowering the element into an interior space defined  
by the apparatus to a required depth within the  
borehole; and

iii) adjusting the upper and lower positioning means to  
20 achieve the desired plan position and orientation of  
the element.

10. A method as claimed in claim 9, wherein before  
placing the apparatus into the borehole, a temporary  
25 shaft lining tube is placed within the borehole.

11. A method as claimed in claim 10, wherein the  
orientation of the apparatus is fixed relative to the  
temporary casing by means of a plurality of locking  
30 rams.


11. An apparatus/method substantially as hereinbefore  
described with reference to the accompanying drawings.

## ABSTRACT

Placing Elements in Piles


5 The present application relates to an apparatus and  
method for placing an element, such as a steel column  
or concrete section, into a pile shaft during top-down  
construction techniques. The apparatus is provided with  
an upper and lower positioning means which allow the  
10 plan position of the element at upper and lower levels  
respectively to be adjusted. An advantage of the  
present invention is that the positioning means are  
joined by means of a non-rigid connection which allows  
the length of the apparatus to be adjusted so as to  
15 suit the specific requirements of a particular  
operation.

20 Figure 1

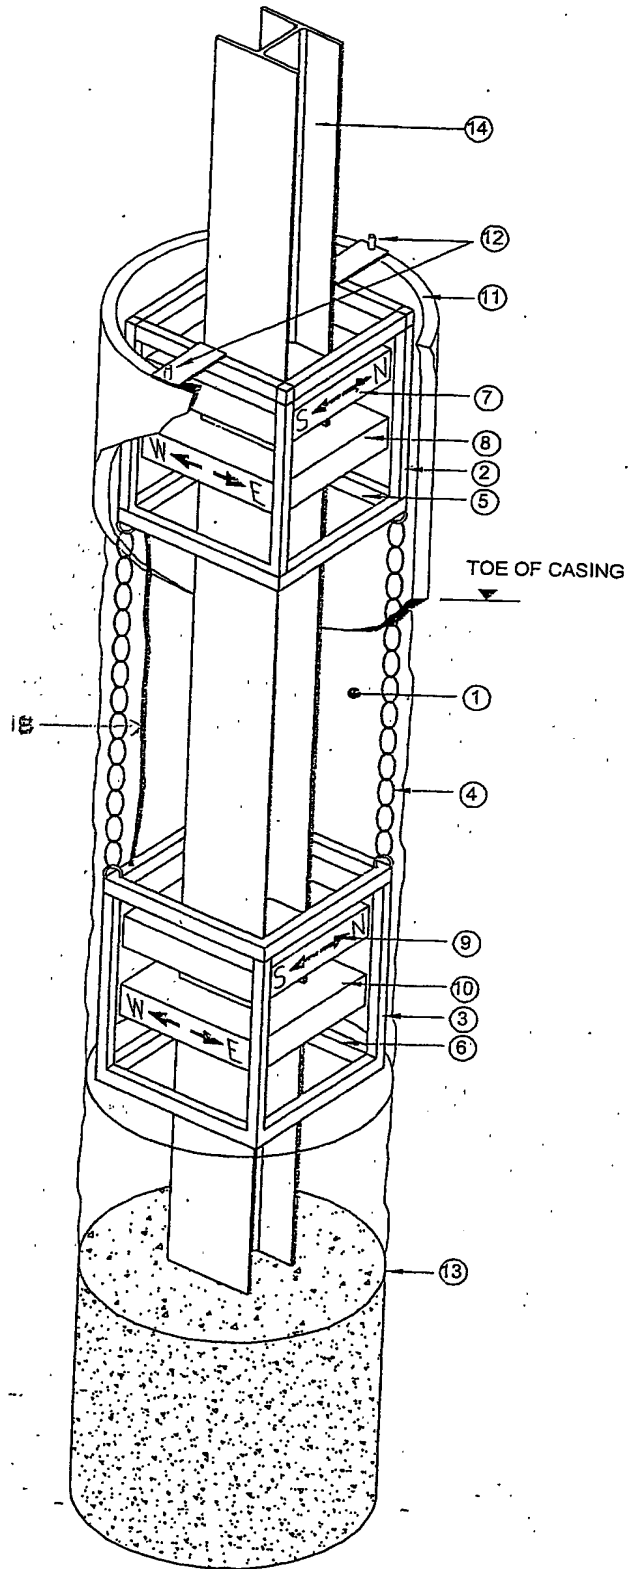


CEMLOC - VL PRINCIPLE OF OPERATION

Fig. 1

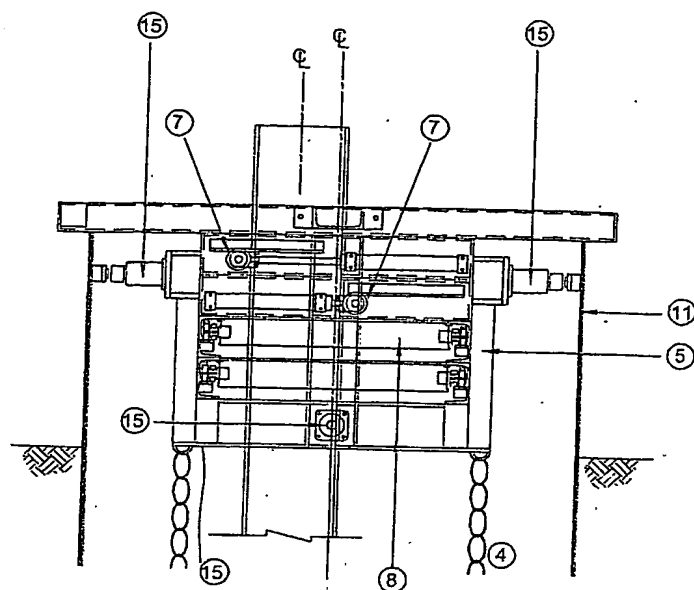


COLUMN AT LEFT

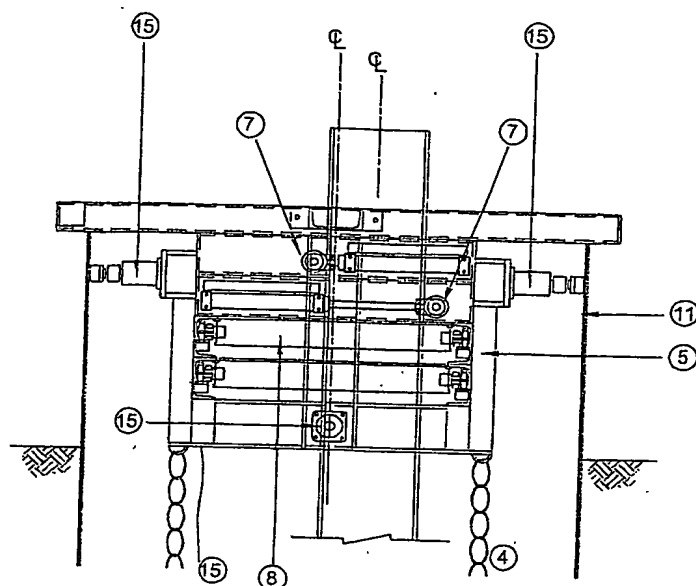


COLUMN AT RIGHT

UPPER STEERING MODULE (2)

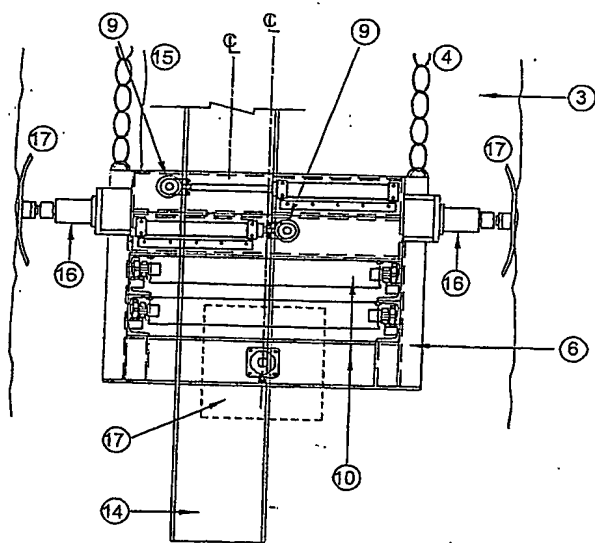

COLUMN AT LEFT

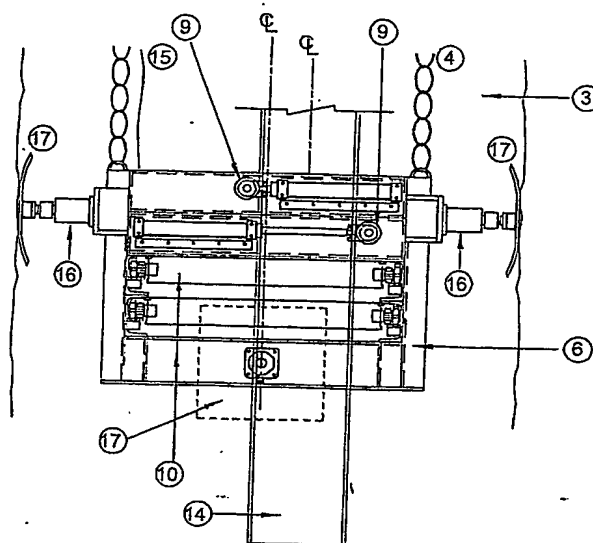


COLUMN AT RIGHT

LOWER STEERING MODULE (3)

CEMLOC - VL PRINCIPLE OF OPERATION


Fig. 2

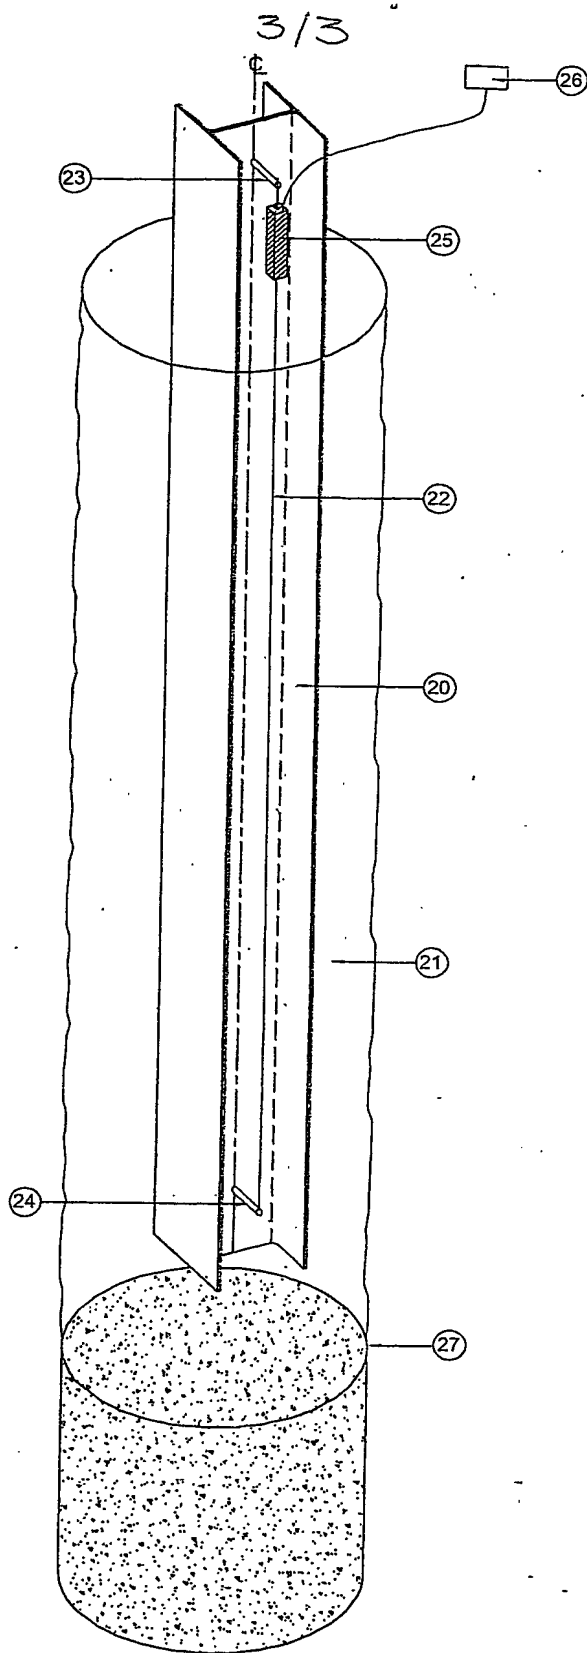

CEMLOC - VL MONITORING VERTICAL ALIGNMENT

Fig. 3

PCT/GB2004/000951



1  
This Page is inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images problems checked, please do not report the problems to the IFW Image Problem Mailbox**